




24M Tower GMJ LL22.350





24M Tower GMJ LL22.350

## TECHNICAL SPECIFICATION & FEATURES

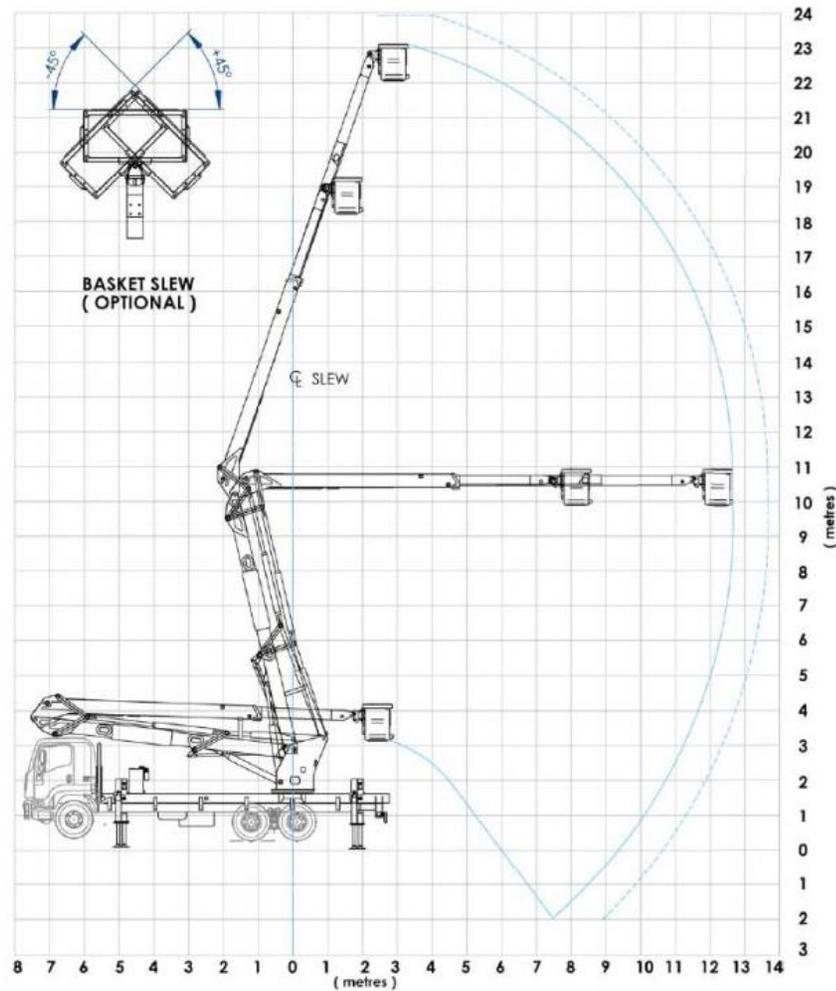



## 24M Tower GMJ LL22.350

### Technical Data

<b>MANUFACTURER</b>	<b>GMJ Equipment</b>
<b>EQUIPMENT MODEL</b>	<b>GMJ LL22-350</b>
<b>SAFE WORKING LOAD</b>	<b>350 kg</b>
<b>WITH BASKET ROTATOR</b>	<b>325 kg</b>
<b>WORKING HEIGHT</b>	<b>24.0 m</b>
<b>FLOOR HEIGHT</b>	<b>22.0 m</b>
<b>REACH</b>	<b>13.0 m</b>
<b>CAB CHASSIS MIN. REQUIREMENT</b>	<b>5.3 m, 16,000 kg GVM</b>
<b>BASKET CONSTRUCTION</b>	<b>Fibreglass - Flame retardant to ASTM D635</b> <b>Non-slip grit type on internal/external access steps</b>
<b>BASKET SIZE (INTERNAL)</b>	<b>1.2 m (wide) x 0.7 m (long) x 1.0 m (high)</b> <b>1.5 m (wide) x 0.7 m (long) x 1.0 m (high)</b>
<b>BASKET ARTICULATION</b>	<b>0° - Fixed</b> <b>± 45° - Helical rotary actuator</b>
<b>HYDRAULIC CIRCUIT</b>	<b>Closed centre</b> <b>Open centre</b>
<b>HYDRAULIC OPERATING PRESSURE</b>	<b>17 MPa</b>
<b>HYDRAULIC PILOT PRESSURE</b>	<b>3.5 MPa</b>
<b>HYDRAULIC TANK</b>	<b>185L – Capacity</b> <b>Sight glass with temperature gauge</b>